


NEW

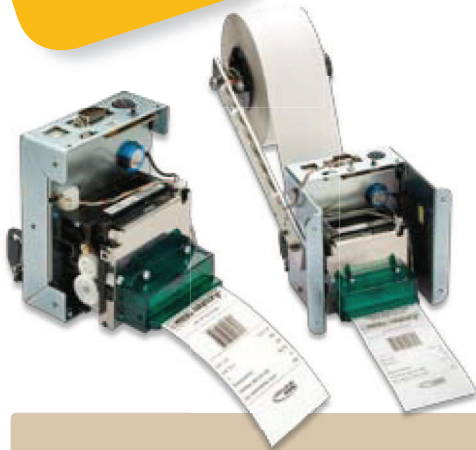

KPSM / KPSH

58 - 60 mm

Key features

- Compact and rugged design
- Easy to integrate
- High speed printing



| Characteristics | Unit | KPSM | KPSH |
|------------------------|---------|---|---|
| Printing Speed (max) | mm/s | 150 (12V) - 250 (24V) | |
| Printing Width | mm | 56 | |
| Resolution | dot/mm | 8 | |
| Number of Dots | dot | 448 | |
| Number of Columns | column | 28 or 37 max | |
| Character Size | dot*dot | 12 x 24 or 16 x 24 | |
| Resident Code Page | --- | CP 437, 737, 850, 852, 858, 860, 862, 863, 865, 866, 1252, 1256 + EasyFont Compatible | |
| Bar Code Type | --- | Code 39, 93, 128, Interleaved 2/5, UPC-A, UPC-E, JAN8 (EAN8) & JAN13 (EAN13), Codabar, PDF417 | |
| Paper Width | mm | 58 - 60 | |
| Paper Roll Diameter | mm | up to 200 (various angular position) | |
| Paper Thickness | µm | From 60 to 100 | |
| Paper Loading | --- | Auto loading | |
| Operating Voltage | VDC | 12 or 24 V | |
| Power Consumption | W | 75 | |
| Head Pulse Life | pulse | 1*10 ⁸ | |
| Mechanical Reliability | Km | 100 | |
| Dimensions (W*D*H) | mm | 95 x 120 x 118 | 125 x 120 x 118 / 126 x 289 x 118 (with paper roll holder) |
| Weight | g | 960 | 960 / 1230 (with paper roll holder) |
| Operating Temperature | °C/F | - 25 to 70 / -13 to 158 | |
| Operating Humidity | % RH | 20 to 85 (non condensing) | |
| Cutter | --- | Guillotine (full and partial cuts) | |
| Cutter Life | cuts | 1 Million | |
| Data Buffer | Kbytes | 4 | |
| Interface | --- | RS232 or USB 2.0 | |
| Driver | --- | Windows™ 00 / XP / Vista / Linux | |
| CEM & Safety Standards | --- | UL60950-1, CSA 22.2-60950-1, IEC60950, CE Class B, FCC Class B, C-Tick | |
| Sensors | --- | Top of form and paper out and bezel with paper jam detection | |
| Accessories | --- | Power supply | Power supply, paper roll holder with paper low sensor (option), sens'n print (option) |

