



Retail



Healthcare & Pharmacy



Post & Parcel



Warehouse & Storage Handling

COMPREHENSIVE & RELIABLE

4 inch Barcode Label Printer

SLP-T400

BIXOLON SLP-T400 is the most comprehensive and reliable model of industrial direct thermal / thermal transfer label printers in the marketplace today. The SLP-T400 is an ideal for a wide array of mission critical bar code labeling requirements including 2D, such as Maxicode, PDF417, QR Code and Data Matrix applications. In fact, where intricate two-dimensional bar coding is required for compliance labeling, small parts tracking, or product identification, the SLP-T400 has emerged as the printer of choice by large, multinational operations.



HIGHLIGHTS

Advanced Hardware

- Paper feeding speed up to 6 ips (152 mm/sec)
- High resolution of printing (Optional 300 dpi : SLP-T403)
- Wide range of ribbon rolls length from 74m to 300m
- Triple interface on board standard
- Optional RFID model (SLP-T400R)

Enhanced Firmware

- Multiple programming languages recognizable : SLCS, BPL-Z™, BPL-E™
- The label format can be stored in the printer and can be reused 2D Barcode printing
- 23 Code pages supported



BIXOLON[®]
a Better Solution for your Business™

4 inch Barcode Label Printer

SLP-T400



SLP-T400

SLP-T400C
(with Auto-cutter)


SLP-T400R
(with RFID)

FEATURES

All-in-one interface

- Standard
USB + Serial + Parallel
- Optional
USB + Serial + Ethernet


(Standard)

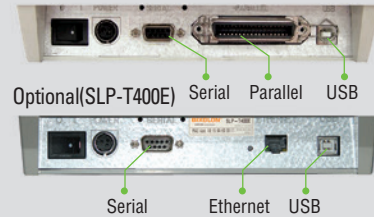

User-friendly design

- Wide range of ribbon capacity
- Easy paper loading with adjustable paper guide
- Pause and cancel function-keys

Ribbon range of ribbon capacity



Multiple programming languages recognizable

The SLP-T400 is compatible with market-leading programming language; SLCS, BPL-Z™, BPL-E™.



Label Artist™

Bixolon provides its custom label design program as bundle. It supports **database** connection as well as text, drawing lines and boxes, all kinds of graphics and 1D/2D Barcode printing.

BR-SLP-T400-EN-MAR14

Copyright © 2014 BIXOLON Co., Ltd. All rights reserved.

Features and specifications are subject to change without prior notice.

SPECIFICATIONS

Print Characteristics

Printing Method: Thermal Transfer, Direct Thermal

Printing Speed: SLP-T400: Up to 6 ips (152 mm/s)

SLP-T403: Up to 4 ips (100 mm/s)

Print Resolution: SLP-T400: 203 dpi / SLP-T403: 300 dpi

Printing Width: SLP-T400: Up to 104 mm / SLP-T403: Up to 105.7 mm

Printing Length: 6 ~ 1,000mm

Media Sensor: Transmissive, Reflective (adjustable), Ribbon-End, Head open

Media Characteristics

Media Type: Gap, Black Mark, Notch, Continuous, Fan-Fold

Media Width: 15 ~ 116 mm

Media Roll Diameter: Up to 130 mm

Media Thickness: 0.06 ~ 0.20 mm

Supply Method: Easy Paper Loading

Ribbon Characteristics

Ribbon Type: Wax, Wax / Resin, Resin

Ribbon Width: 33 ~ 110 mm

Ribbon Length: Up to 300 m

Core Inner Diameter: 12.5 / 25.4 mm

Physical Characteristics

Dimensions (W x L x H): 214 x 310 x 200 mm (8.42 x 12.20 x 7.87 inch)

Weight: 2.75 kg (6.06 lbs.)

Power: EnergyStar Certified, External Power Adaptor 100-240V AC, 50/60Hz

Performance Characteristics

Memory: 8MB SDRAM, 2MB FlashROM

Interface: Triple Interface

Standard: USB V1.1 FS + Serial + Parallel

Optional: USB V1.1 FS + Serial + Ethernet

Environment Characteristics

Temperature: Operating: 5 ~ 40 °C (41 ~ 104 °F)

Storage: -20 ~ 60 °C (-4 ~ 140 °F)

Humidity: Operating: 10 ~ 80% RH / Storage: 10 ~ 90% RH

Software

Emulation: SLCS, BPL-Z™, BPL-E™

Driver / Utility: Windows Driver, Linux CUPS Driver, Mac Driver, Virtual COM
USB/Ethernet Driver, Utility Program, Label Artist™

SDK: Android SDK

Fonts / Graphics / Symbologies

Character Sets: · 10 SLCS Resident Bitmap Fonts

· One SLCS Resident Scalable Font

· 23 Code Page

Graphics: Supporting user-defined fonts, graphics, formats, and logos

Barcode Symbologies: 1D: Coda Bar, Code 39, Code 93, Code 128, EAN-8, EAN-13, IMB, Interleaved 2-of-5, ITF, UCC/EAN-128, UPC-A, UPC-E

2D: Data Matrix, MaxiCode, PDF417, QR Code
(select two only)

Options

Ethernet, RFID (Frequency: 885 ~ 955 MHz, Transmit Power: 1W,

Modulation: ASK, Air Protocol: GEN2, Type: FHSS), Peeler, Auto Cutter,
External Paper Supply

BIXOLON®

www.bixolon.com



BIXOLON Co., Ltd.

7-8F, (Sampyeong-dong), 20, Pangyoyeok-ro241beon-gil,
Bundang-gu, Seongnam-si, Gyeonggi-do, 463-400, Korea (ROK)

Tel +82 (0) 31 218 5500

Fax +82 (0) 31 218 5589

E-mail sales@bixolon.com

BIXOLON America Inc.

3171 Fujita St Torrance,
CA 90505, USA

Tel +1 858 764 4580

Fax +1 310 257 6869

E-mail sales@bixolonusa.com

BIXOLON Europe GmbH

Tiefenbroicher Weg 35,
40472 Düsseldorf, Germany

Tel +49 211 68 78 54 0

Fax +49 211 68 78 54 20

E-mail sales@bixolon.de